






ELGEF Plus Anbohrschelle PE100 d63-400mm / SDR11 / Mit 360° drehbarem Abgang

- 5 bar Gas / 16 bar Wasser
- Mit eingebautem Bohrer zum Anbohren unter Druck stehender Leitungen
- Komplett mit Unterteil
- 4 mm Steckkontakt
- Wegbegrenzte Schweissanzeige
- Langer Abgangsstutzen
- O-Ring gedichtete Schraubkappe
- d355-400mm. Nicht geeignet für Rohre mit einer Wanddicke grösser als SDR17.

*Topload: Lieferung ohne Unterteil, als Top Load mit Werkzeug 799.350.477 zu montieren; Winkeladapterstecker (799.350.340) für Schweisskabel erforderlich.

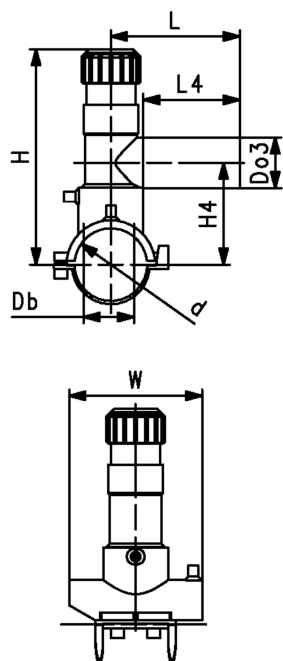


d (mm)	Do3 (mm)	SDR	PN (bar)	DN (mm)	Code	Gewicht (kg)
63	20	11	16	50	193 131 402	0.697
63	25	11	16	50	193 131 403	0.637
63	32	11	16	50	193 131 404	0.701
63	40	11	16	50	193 131 405	0.718
63	63	11	16	50	193 131 437	1.426
75	20	11	16	65	193 131 442	0.831
75	25	11	16	65	193 131 443	0.830
75	32	11	16	65	193 131 444	0.812
75	40	11	16	65	193 131 445	0.849
75	63	11	16	65	193 131 447	1.549
90	20	11	16	80	193 131 452	0.794
90	25	11	16	80	193 131 453	0.790
90	32	11	16	80	193 131 454	0.770
90	40	11	16	80	193 131 455	0.811
90	63	11	16	80	193 131 457	1.494
110	20	11	16	100	193 131 462	0.826
110	25	11	16	100	193 131 463	0.808
110	32	11	16	100	193 131 464	0.831
110	40	11	16	100	193 131 465	0.805
110	63	11	16	100	193 131 467	1.097
125	20	11	16	100	193 131 472	0.880
125	25	11	16	100	193 131 473	0.878
125	32	11	16	100	193 131 474	0.878
125	40	11	16	100	193 131 475	0.874
125	63	11	16	100	193 131 477	1.184
140	20	11	16	125	193 131 482	0.887
140	25	11	16	125	193 131 483	0.874
140	32	11	16	125	193 131 484	0.894
140	40	11	16	125	193 131 485	0.920
140	63	11	16	125	193 131 487	1.180
160	20	11	16	150	193 131 492	0.916
160	25	11	16	150	193 131 493	0.912
160	32	11	16	150	193 131 494	0.915
160	40	11	16	150	193 131 495	0.936
160	63	11	16	150	193 131 497	1.221
180	20	11	16	150	193 131 502	0.994
180	25	11	16	150	193 131 503	1.001
180	32	11	16	150	193 131 504	0.957
180	40	11	16	150	193 131 505	1.007
180	63	11	16	150	193 131 507	1.587
200	20	11	16	200	193 131 512	1.015
200	25	11	16	200	193 131 513	1.015
200	32	11	16	200	193 131 514	0.985
200	40	11	16	200	193 131 515	1.024
200	63	11	16	200	193 131 517	1.290
225	20	11	16	200	193 131 522	1.016



	d (mm)	Do3 (mm)	SDR	PN (bar)	DN (mm)	Code	Gewicht (kg)
	225	25	11	16	200	193 131 523	1.025
	225	32	11	16	200	193 131 524	1.019
	225	40	11	16	200	193 131 525	1.029
	225	63	11	16	200	193 131 527	1.738
	250	20	11	16	250	193 131 532	1.025
	250	25	11	16	250	193 131 533	1.026
	250	32	11	16	250	193 131 534	0.996
	250	63	11	16	250	193 131 537	1.733
	250	40	11	16	250	193 131 535	1.008
	280	63	11	16	250	193 131 548	1.478
	315	63	11	16	300	193 131 558	1.481
Topload	355	63	11	16	350	193 131 557	1.481
Topload	400	63	11	16	400	193 131 577	1.473

	d (mm)	Do3 (mm)	Db (mm)	H (mm)	H4 (mm)	W (mm)	L4 (mm)	L (mm)	SDR Rohr
	63	20	32	186	108	164	71	130	9 - 11
	63	25	32	186	108	164	71	130	9 - 11
	63	32	32	186	108	164	76	130	9 - 11
	63	40	32	186	108	164	81	137	9 - 11
	63	63	32	134	112	164	100	160	9 - 11
	75	20	32	191	113	164	71	130	9 - 11
	75	25	32	191	113	164	71	130	9 - 11
	75	32	32	191	113	164	76	130	9 - 11
	75	40	32	191	113	164	81	137	9 - 11
	75	63	32	240	118	164	100	160	9 - 11
	90	20	32	199	121	164	71	130	9 - 11
	90	25	32	199	121	164	71	130	9 - 11
	90	32	32	199	121	164	76	130	9 - 11
	90	40	32	199	121	164	81	137	9 - 11
	90	63	35	248	126	164	100	160	9 - 11
	110	20	32	209	131	164	71	130	9 - 17.6
	110	25	32	209	131	164	71	130	9 - 17.6
	110	32	32	209	131	164	76	130	9 - 17.6
	110	40	32	209	131	164	81	137	9 - 17.6
	110	63	35	258	136	164	100	160	9 - 17.6
	125	20	32	216	138	164	71	130	9 - 17.6
	125	25	32	216	138	164	71	130	9 - 17.6
	125	32	32	216	138	164	76	130	9 - 17.6
	125	40	32	216	138	164	81	137	9 - 17.6
	125	63	35	265	143	164	100	160	9 - 17.6
	140	20	32	233	146	164	71	130	9 - 17.6
	140	25	32	233	146	164	71	130	9 - 17.6
	140	32	32	233	146	164	76	130	9 - 17.6
	140	40	32	233	146	164	81	137	9 - 17.6
	140	63	35	273	151	164	100	160	9 - 17.6
	160	20	32	243	156	164	71	130	9 - 17.6
	160	25	32	243	156	164	71	130	9 - 17.6
	160	32	32	243	156	164	76	130	9 - 17.6
	160	40	32	243	156	164	81	137	9 - 17.6
	160	63	35	283	161	164	100	160	9 - 17.6
	180	20	32	244	166	164	71	130	9 - 26
	180	25	32	244	166	164	71	130	9 - 26
	180	32	32	244	166	164	76	130	9 - 26
	180	40	32	244	166	164	81	137	9 - 26
	180	63	35	293	171	164	100	160	9 - 26
	200	20	32	254	176	164	71	130	9 - 26
	200	25	32	254	176	164	71	130	9 - 26
	200	32	32	254	176	164	76	130	9 - 26

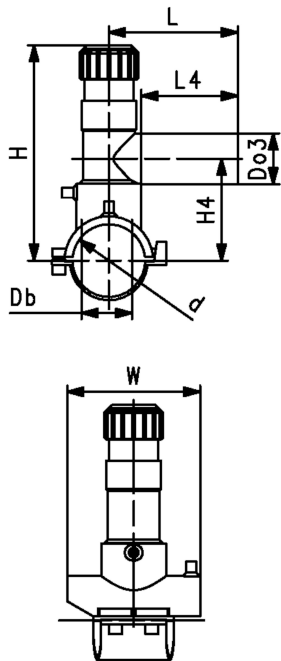

	d	Do3	Db	H	H4	W	L4	L	SDR Rohr
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
	200	40	32	254	176	164	81	137	9 - 26
	200	63	35	303	181	164	100	160	9 - 26
	225	20	32	266	188	164	71	130	11 - 26
	225	25	32	266	188	164	71	130	11 - 26
	225	32	32	266	188	164	76	130	11 - 26
	225	40	32	266	188	164	81	137	11 - 26
	225	63	35	315	193	164	100	160	11 - 26
	250	20	32	279	201	164	76	130	11 - 26
	250	25	32	279	201	164	76	130	11 - 26
	250	32	32	279	201	164	76	130	11 - 26
	250	63	35	328	206	164	100	160	11 - 26
	250	40	32	279	201	164	81	137	11 - 26
	280	63	35	343	206	164	100	160	11 - 26
	315	63	35	381	206	164	100	160	11 - 33
Topload	355	63	35	381	206	165	100	160	17 - 33
Topload	400	63	35	403	206	165	100	160	17 - 33

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>