




ecoFIT Vorschweissbund PE100

d20-800mm / SDR11 / Kombinierte Dichtfläche: flach und gerillt

Ausführung:


- Für IR, Stumpfschweissung nach DVS 2207
- Typ A: ohne Fase
- Typ B: mit Fase
- Passend für Kunststoff Absperrklappe Typ **567/578/565** bis DN250. Ab DN350 wird der ecoFit Adapter SDR11 benötigt.
- Passend für Metall Absperrklappen Typ **038/039/044/065** bis DN250. Ab DN350 wird der eco-Fit Adapter SDR11 benötigt.
- Profildichtung: d20-d800 NBR, EPDM, FKM
- Flachdichtung: 20-d315 EPDM, FKM
- Druckstufe: 16 bar
- Bitte beachten sie das Online Anwendung Perfekte Flanschverbindung - GF Piping Systems (gfps.com)

*Mechanisch bearbeitet

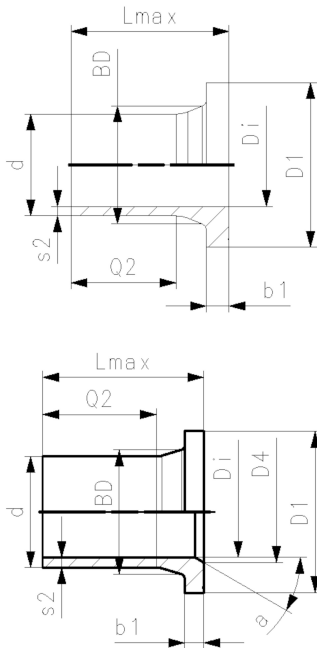

d	Di	Typ	DN	PN	Code	NPK	Gewicht	
(mm)	(mm)		(mm)	(bar)			(kg)	
20	16	A	15	16	753 798 306		0.016	
25	20	A	20	16	753 798 307		0.034	
32	26	A	25	16	753 798 308		0.046	
40	32	A	32	16	753 798 309		0.067	
50	40	A	40	16	753 798 310		0.098	
63	49	A	50	16	753 798 311		0.157	
75	58	B	65	16	753 798 312		0.258	
90	70	B	80	16	753 798 313		0.347	
110	87	B	100	16	753 798 314		0.471	
125	99	B	100	16	753 798 315		0.517	
140	111	B	125	16	753 798 316		0.780	
160	127	B	150	16	753 798 317		0.973	
180	148	B	150	16	753 798 318		1.077	
200	174	B	200	16	753 798 319		1.734	
225	196	B	200	16	753 798 320		1.772	
250	203	B	250	16	753 798 321		16.091	
280	228	B	250	16	753 798 322		3.760	
315	256	B	300	16	753 798 323		4.925	
355	284	B	350	16	753 798 324		7.000	
400	320	B	400	16	753 798 325		9.500	
450	360	B	500	16	753 798 326		18.200	
500	400	B	500	16	753 798 327		18.700	
560	458	B	600	16	753 798 833		19.380	
*	630	516	B	600	16	753 798 834		16.500
*	710	581	A	700	16	753 798 835		21.586
*	800	655	A	800	16	753 798 836		28.505

d	Lmax	D1	D4	Q2	s2	b1	BD	a
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
20	50	45		29	1.9	7	26	
25	52	58		27	2.3	9	32	
32	54	68		28	2.9	10	40	
40	55	78		25	3.7	11	49	
50	62	88		32	4.6	12	60	
63	68	102		38	5.8	14	75	
75	80	122	66	43	6.8	16	89	30
90	80	138	78	42	8.2	17	105	30
110	80	158	100	41	10.0	18	125	30
125	82	158	114	35	11.4	25	132	25
140	89	188	127	42	12.7	25	155	27
160	92	212	151	40	14.6	25	175	30
180	92	212	154	40	16.4	30	180	30

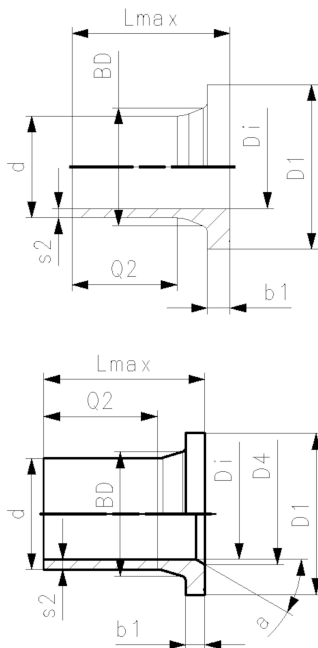

	d	Lmax	D1	D4	Q2	s2	b1	BD	a
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
	200	100	268	203	35	18.2	32	232	30
	225	100	268	210	35	20.5	32	235	30
	250	120	320	252	45	22.7	35	285	25
	280	120	320	265	45	25.4	37	291	30
	315	150	370	300	50	28.6	50	335	22
	355	162	430	342	70	32.2	40	373	45
	400	172	482	387	70	36.3	46	427	45
	450	225	585	400	105	40.9	60	514	15
	500	231	585	442	105	45.4	60	530	15
	560	141	684	490	20	50.8	60	615	30
*	630	135	684	545	40	57.2	60	642	30
*	710	120	800		20	64.5	60	737	
*	800	120	905		18	72.6	65	840	

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>