
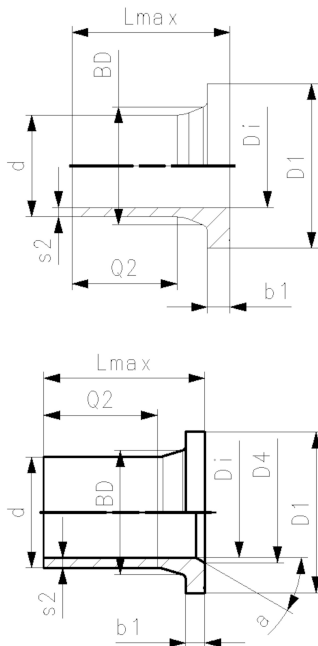




ELGEF Plus Vorschweissbund PE100

d50-1000mm / SDR17 / Langschenklige Version / Kombinierte Dichtfläche: flach und gerillt


Ausführung:

- Für IR, Stumpf- und Elektroschweissung nach DVS 2207
- Typ A: ohne Fase
- Typ B: mit Fase
- Passend für Kunststoff Absperrklappe **Typ 567/578/565** bis DN250. Ab DN300 wird der ecoFit Adapter SDR17 benötigt
- Passend für Metall Absperrklappen **Typ 038/039/044/065** bis DN250. Ab DN300 wird der eco-Fit Adapter SDR17 benötigt
- Profildichtung: d50-d1000 NBR, EPDM, FKM
- Flachdichtung: 50-d315 EPDM, FKM
- Druckstufe: 10 bar Wasser / 5 bar Gas
- Bitte beachten sie das Online Anwendung Perfekte Flanschverbindung - GF Piping Systems (gfps.com)


* Bearbeitet / verlängert

d (mm)	Di (mm)	Typ	DN (mm)	Code	PF	NPK	Gewicht (kg)
50	44	A	40	753 800 085	2 51 301 001		0.107
63	55	A	50	753 800 086	2 51 301 001		0.168
75	66	A	65	753 800 087	2 51 301 001		0.260
90	79	A	80	753 800 088	2 51 301 001	425 416	0.367
110	96	A	100	753 800 089	2 51 301 001	425 427	0.571
125	110	B	100	753 800 090	2 51 301 001	425 428	0.684
140	123	B	125	753 800 091	2 51 301 001	425 431	1.035
160	141	B	150	753 800 092	2 51 301 001	425 442	1.342
180	158	A	150	753 800 093	2 51 301 001	425 443	1.469
200	176	B	200	753 800 094	2 51 301 001	425 454	2.212
225	198	B	200	753 800 095	2 51 301 001	425 455	2.456
250	220	B	250	753 800 096	2 51 301 002	425 466	3.500
280	246	B	250	753 800 097	2 51 301 002	425 467	3.780
315	277	B	300	753 800 098	2 51 301 002	425 478	5.470
355	310	B	350	753 800 299	2 51 301 008		7.100
400	350	B	400	753 800 300	2 51 301 008		9.600
450	400	A	500	753 800 301	2 51 301 008		16.400
500	400	A	500	753 800 302	2 51 301 008		18.500
560	493	A	600	753 800 303	2 51 301 008		26.940
630	555	A	600	753 800 304	2 51 301 008		44.260
*	710	A	700	753 800 105	2 51 301 014		39.376
*	800	A	800	753 800 106	2 51 301 014		50.759
*	900	A	900	753 800 107	2 51 301 014		64.202
*	1000	A	1000	753 800 108	2 51 301 014		79.495

d (mm)	Lmax (mm)	D1 (mm)	D4 (mm)	Q2 (mm)	s2 (mm)	b1 (mm)	BD (mm)
50	90	88		62	3.0	12	61
63	106	102		70	3.8	14	75
75	130	122		75	4.5	16	89
90	140	138		103	5.4	17	105
110	160	158		117	6.6	18	125
125	170	158	114	125	7.4	25	132
140	200	188	127	147	8.3	25	155
160	200	212	151	147	9.5	25	175
180	200	212		170	10.7	30	180
200	200	268	203	128	11.9	32	232
225	200	268	210	138	13.4	32	235
250	220	320	245	148	14.8	35	285
280	230	320	265	154	16.6	35	291
315	242	370	300	166	18.7	36	335
355	260	430	346	170	21.1	33	373



	d	Lmax	D1	D4	Q2	s2	b1	BD
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
	400	282	482	395	185	23.7	36	427
	450	316	585		205	26.7	46	514
	500	337	585		220	29.7	46	530
	560	370	685		250	33.2	50	616
	630	390	685		270	37.4	50	644
*	710	425	800		325	42.1	50	737
*	800	465	905		360	47.4	52	840
*	900	490	1005		360	53.3	55	944
*	1000	530	1110		395	59.3	60	1047



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>