


ELGEF Plus T 90° reduziert PE100
d25-400mm / SDR11 / mit angeschweisster Reduktion / Langschenklige Version

- 5 bar Gas / 16 bar Wasser

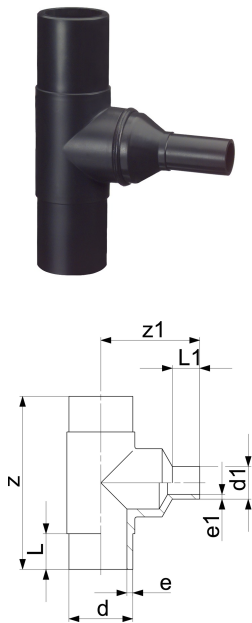

d	d1	DN	PN	SDR	Code	Gewicht	z	z1	L	L1	e	e1
(mm)	(mm)	(mm)	(bar)			(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
25	20	20	16	11	753 201 002	0.053	160		52	52	3.0	3.0
32	20	25	16	11	753 201 003	0.094	170	105	54	52	3.0	3.0
32	25	25	16	11	753 201 004	0.098	170	110	54	52	3.0	3.0
40	20	32	16	11	753 201 005	0.124	190	120	57	52	3.7	3.0
40	25	32	16	11	753 201 069	0.160	190	120	57	52	3.7	3.0
40	32	32	16	11	753 201 070	0.160	190	120	57	52	3.7	3.0
50	20	40	16	11	753 201 072	0.252	210	140	63	52	4.6	3.0
50	25	40	16	11	753 201 077	0.203	210	130	63	52	4.6	3.0
50	32	40	16	11	753 201 080	0.207	210	130	63	53	4.6	3.0
50	40	40	16	11	753 201 081	0.224	210	130	63	57	4.6	3.7
75	40	65	16	11	753 201 084	0.603	264	180	72	57	6.8	3.7
125	63	100	16	11	753 201 085	2.359	366	225	92	61	11.4	5.8
125	75	100	16	11	753 201 086	2.434	366	235	92	72	11.4	6.8
140	75	125	16	11	753 201 087	3.038	396	230	92	70	12.7	6.8
140	90	125	16	11	753 201 089	3.092	396	235	92	79	12.7	8.2
140	110	125	16	11	753 201 090	3.208	396	240	92	82	12.7	10.0
140	125	125	16	11	753 201 091	4.170	396	240	92	90	12.7	11.4
160	125	150	16	11	753 201 092	4.544	420	265	102	92	14.6	11.4
160	140	150	16	11	753 201 093	5.895	420	270	102	96	14.6	12.7
180	125	150	16	11	753 201 094	6.111	460	285	107	92	16.4	11.4
180	140	150	16	11	753 201 095	6.317	460	295	107	110	16.4	12.7
200	125	200	16	11	753 201 096	8.424	500	295	117	92	18.2	11.4
200	140	200	16	11	753 201 097	10.570	500	310	117	110	18.2	12.7
200	180	200	16	11	753 201 098	9.031	500	310	117	110	18.2	16.4
225	125	200	16	11	753 201 099	11.260	540	320	122	92	20.5	11.4
225	140	200	16	11	753 201 100	14.574	540	335	122	110	20.5	12.7
225	200	200	16	11	753 201 101	14.925	540	340	122	117	20.5	18.2
250	180	250	16	11	753 201 102	14.327	576	350	130	105	22.7	16.4
250	200	250	16	11	753 201 103	19.220	576	360	130	112	22.7	18.2
250	225	250	16	11	753 201 104	15.240	576	390	130	120	22.7	20.5
280	200	250	16	11	753 201 105	24.520	616	420	139	112	25.4	18.2
280	225	250	16	11	753 201 106	21.755	616	420	139	120	25.4	20.5
280	250	250	16	11	753 201 107	21.055	616	420	139	130	25.4	22.7
315	280	300	16	11	753 201 109	34.950	690	480	150	139	28.6	25.4
355	250	350	16	11	753 201 110	48.900	818	530	165	130	32.3	22.7
355	280	350	16	11	753 201 111	49.300	818	480	165	139	32.3	25.4
355	315	350	16	11	753 201 112	49.690	818	480	165	150	32.3	28.6
400	280	400	16	11	753 201 113	52.915	910	530	180	139	36.4	25.4
400	315	400	16	11	753 201 114	53.625	910	580	180	150	36.4	28.6
400	355	400	16	11	753 201 115	54.075	910	675	180	165	36.4	32.3

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>