




SYGEF Standard Vorschweissbund Dichtfläche gerillt SDR21/PN16

Ausführung:

- Werkstoff: PVDF
- * SYGEF Plus (PVDF-HP)

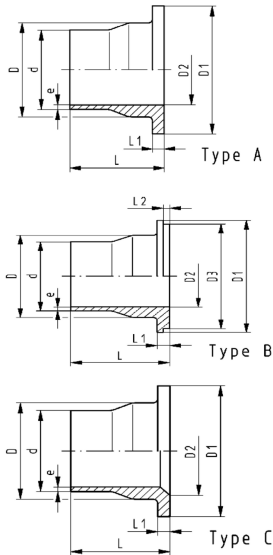

d	DN	PN	SDR	SM	Code	Gewicht
(mm)	(mm)	(bar)				(kg)
20	15	16	21	WNF, IR	735 798 806	0.029
25	20	16	21	WNF, IR	735 798 807	0.046
32	25	16	21	WNF, IR	735 798 808	0.070
40	32	16	21	WNF, IR	735 798 809	0.096
50	40	16	21	WNF, IR	735 798 810	0.136
63	50	16	21	WNF, IR	735 798 811	0.198
75	65	16	21	WNF, IR	735 798 812	0.311
90	80	16	21	WNF, IR	735 798 813	0.394
110	100	16	21	WNF, IR	735 798 814	0.561
140	125	16	21	IR	735 798 816	0.861
160	150	16	21	IR	735 798 817	1.200
200	200	16	21	IR	735 798 819	1.900
225	200	16	21	IR	735 798 820	2.000
*	250	250	16	IR	735 798 846	3.658
*	280	250	16	IR	735 798 847	3.586
*	315	300	16	IR	735 798 848	5.028

d	D	D1	D2	D3	L	L1	L2	e	Typ
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
20	26	45	15		54	6		1.9	A
25	32	58	20	54	56	7	4	1.9	B
32	40	68	26	63	58	7	4	2.4	B
40	49	78	34	73	68	8	4	2.4	B
50	60	88	43	82	69	8	4	3.0	B
63	75	102	56		72	9		3.0	A
75	89	122	66		80	10		3.6	A
90	105	138	78	133	81	12	4	4.3	B
110	125	158	100		81	13		5.3	C
140	155	188	127		90	16		6.7	C
160	175	212	151		93	17		7.7	C
200	232	268	207		102	22		9.6	C
225	235	268	207		102	22		10.8	C
*	250	285	320	249	122	25		11.9	C
*	280	291	320	249	122	25		13.4	C
*	315	335	370	300	124	28		15.0	C

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>